

LC 600 LeakCam - The new generation of the leak detectors



CS INSTRUMENTS has been a leading global manufacturer of measurement technology for compressed air and gases for more than 20 detectors have been incorporated into the development and research of the LeakCam 600.

and leakage measurement of compressed air and gases. This know-how, coupled with over 20 years of experience in the development of leak detectors, has gone into the development of the LeakCam 600.

During development, particular attention was paid to practicality and user-friendliness. What does it really mean for the service technician or maintenance engineer to search for and document gas leaks and compressed air leaks in the production process with a leakage camera in their hand for 8 hours, for example?

Unlike many other leakage cameras, the LC 600 was developed with these points in mind, such as:

- The unique integrated laser distance measurement automatically calculates the distance to the leak. There is no need for time-consuming and incorrect distance measurement as with other devices. Precise measurement of the distance to the leak is the most important parameter for accurate leakage calculation.
- Special camera module for wide-angle view, allowing the user to quickly gain an overview of larger rooms
- LED for illuminating dark rooms
- Carrying strap, included
- Battery replacement concept

Features



1280 x 720 Pixel for precise leak localizationLeckage

Cost Quantification
allocation and savings
Shows the leakage rate in l/min and costs in €

Neck Strap Loops
Comfortable and easy handling

Grip for One-Handes Operation
Leaving the other hand for the touchscreen

18 V Einhell Power X-Change
Two batteries with an external charger for
up to 8 hours of use



64 MEMS Microphones (2 kHz - 80)
Detects minor leaks from up to 10 meters

High-resolution images for clear leak documentation

Laser Distance Module
Preciseultrasoundfocusingand leak rate
estimation

5 LEDs & Ambient Light Sensor
Enhance image quality in dark
environments





POWER BEAM FORMING

“Power Beam Forming” sets new standards in leak detection

Cost and CO₂ savings - but also safety aspects - are the driving forces behind leak detection in gas, compressed air or vacuum applications. With the LC 600 in combination with an ultrasonic transmitter, leak tests can also be carried out reliably. The LeakCam 600 only requires 64 microphones for these tasks and achieves unique dynamics and sensitivity. This means that even very small leaks can be made visible in the presence of large, dominant ultrasonic sources. Dominant sources can be larger leaks, but also disturbing noises - caused by production machines.


Advantages of Power Beam Forming at a glance:

Reliability due to unique dynamics - small leaks are no longer overlooked in the presence of large leaks.

Even faster work: One look with the LeakCam 600 covers an approx. 50% larger area more reliably than competitor products.

Ultrasonic cameras with up to 200 microphones that are currently available advertise a huge time saving in leak detection compared to conventional devices. However, all these devices fail to detect various leaks due to a decisive technological disadvantage - especially when there are several leaks in a small space or individual, major leaks.

Using the standard beam forming method, even doubling the number of microphones to 128 can only detect a second leak. Additional microphones do not provide any added value.

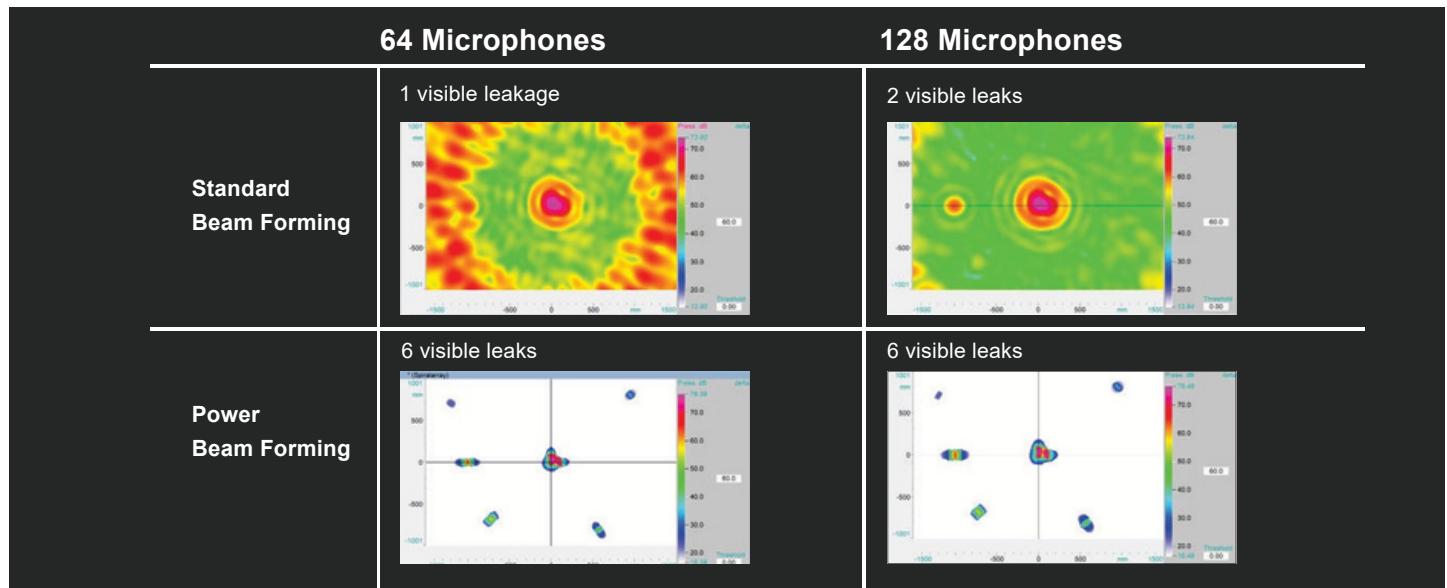

Thanks to the Power Beam Forming process and the associated dynamics, the LC 600 can fully exploit the advantage of the large image aperture angle. The device can check an area of 4 x 3m from a distance of 3m at a glance - without missing any small leaks.

How does an acoustic/ultrasonic camera for leak detection work?

Acoustic and ultrasonic cameras have several microphones whose signals are bundled by beamforming algorithms to make sound their arrangement.

For leak detection of pressurized gases, the ultrasonic range around 40 kHz is typically used, as this is where the characteristic noises production environments.

Threefold better leak detection through Power Beam Forming



(Standard Beam Forming)

There are various beamforming methods, with standard beamforming being used in the ultrasonic cameras currently available, as it is relatively simple and does not require much computing power. However, the dynamic range is limited to around 4 dB, which means that only the loudest leakage is detected, while quieter noises are overlooked.

The dynamic range therefore describes how much the volume of

the sound



LeakCam 600 with 64 microphones
(Power Beam Forming)

The LeakCam uses

the **Power Beam Forming**, which achieves a unique . With Power Beam Forming, multiple sound sources

Thanks to the higher dynamic range, quieter ultrasonic noises can be detected in leaks in automated systems or the compressor room. Power Beam Forming can therefore be used to search areas from a greater distance without overlooking “weaker” leaks!




Precision

Wide Microphone Spacing for Precise Leak Detection from Near to Far

The 20 cm microphone spacing of the LeakCam – measured as the diameter between the outermost microphones – ensures maximum precision in leak detection. In close range, it allows for pinpoint localization of even the smallest leaks, while in long-range applications, it provides reliable detection over greater distances. For enhanced focusing, the integrated laser distance module can be used. This ensures the LeakCam delivers clear and precise results – regardless of the distance to the leak.

Precise leak detection from far distances with acoustic zoom

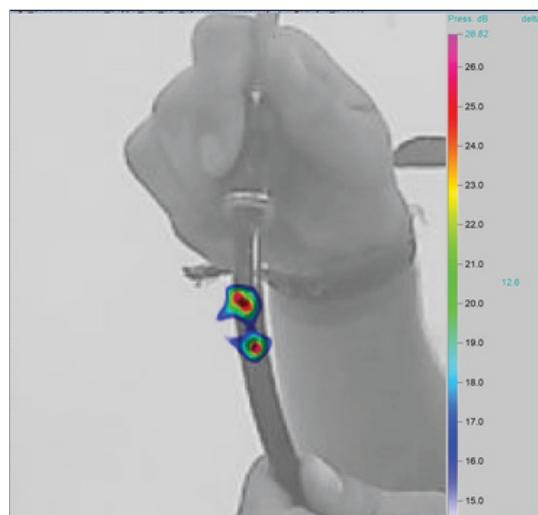


With the “acoustic zoom” of the LeakCam 600, leaks can be precisely localized from far distances by focusing ultrasonic noises even more strongly. In combination with the optical zoom (x2, x4, x8), this gives you

access

Highest precision even at close range - LeakCam 600 for distances from 10 cm

The LeakCam enables extremely precise leak detection at close ranges from 10cm and above due to the maximum transit time the leak, smaller leaks can be found. This ensures a particularly precise coloration of the ultrasonic image, so that you can clearly distinguish between a leaking thread and a damaged coupling in the case of a quick coupling. This allows the cause of the leak to be determined quickly and precisely, even with the smallest defects.

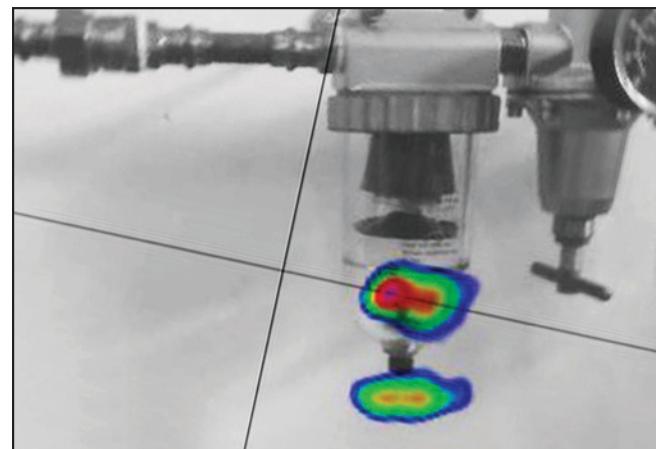

Application



Application Pneumatics

found in the smallest of spaces. Thanks to Power Beam Forming, you can see all leaks at a glance. Small leaks are no longer overlooked in the presence of large leaks. The device therefore



Application technical Gases

In addition to compressed air, the LC 600 is used for a wide range of technical gases such as nitrogen, argon, carbon dioxide, helium or hydrogen. Leaks can be detected with pinpoint accuracy even from great distances. This is ensured by a very high sensitivity and the optical zoom, among other things.



Application Flammable Gases

The device works from the lowest system pressures of around 250 mbar and detects leaks even from a greater distance than conventional can be covered.




Application Refrigerant Systems

Ammonia and CO₂ refrigerant systems where only the smallest leaks are tolerated can be tested with the LC600. Thanks to its unique



Application Discharge / Corona Effect

The LC 600 can detect partial discharges even in noisy environments and from a distance of up to 120 meters. Large area scanning and non-contact measurement save time compared to other methods.

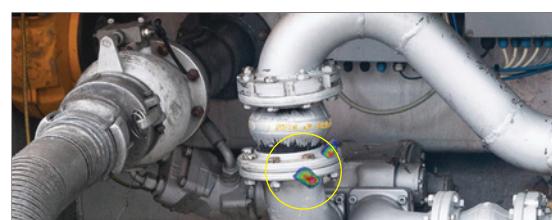

Application Vacuum

Unlike compressed air leaks, where the sound generated by the leak is emitted into the environment, the sound generated by here too thanks to its unparalleled sensitivity.



Application Leak Test

In combination with an ultrasonic transmitter, the LC 600 can be used to carry out leak tests. Acceptance of pressure vessels, commissioning of extinguishing systems, leak tests of driver's cabs or blow door tests can be made much easier and faster.



Documentation

Simple documentation in the LeakCam 600 directly on site

LeakTag	Company	Building	Place	Measure	Leak.Element	Replacement	Manufacturer	Reported by	Estimated Repair time (minutes)	Repair Status	Repair under pressure possible?
1	CS	HQ	Training	Measure	Element	Replacement	Manufacturer	Person	10	fixed	possible

← Preview L#001 07.08.2025

Company	Building	Place	Leak.Element	Measure
CS	HQ	Training	Element	Measure


The location of each leak can be stored: Company / building / location

Efficiency and clarity also for elimination of leaks. Definition of the necessary spare parts and maintenance work already on site.

Spare parts list in the device

The software can be used to transfer a custom spare parts list to the device. The device offers an intelligent search function with auto-complete feature. The list with the required spare parts can be exported from the CS Leak Reporter software.

Reporting Software

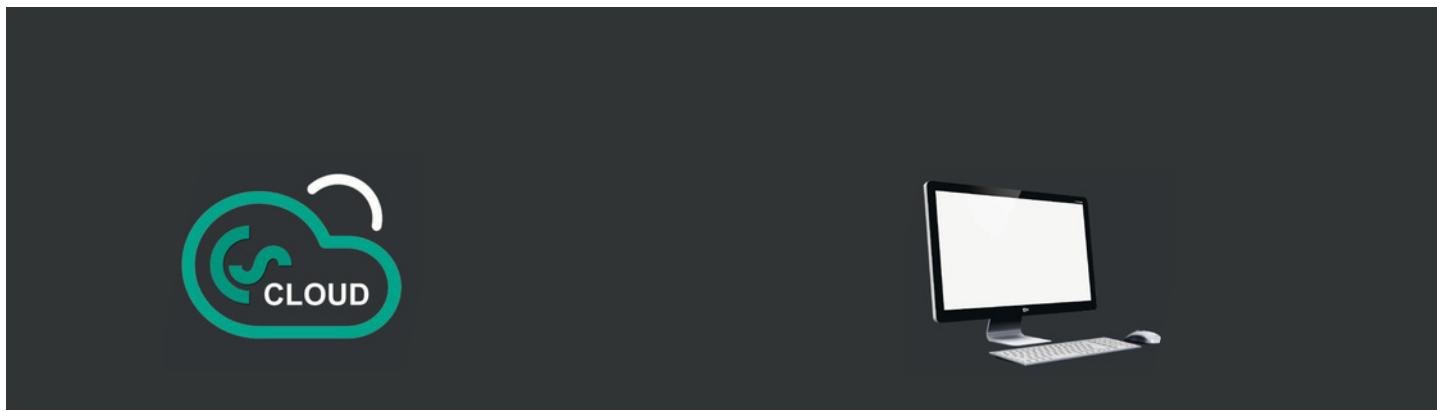

CS Leak Reporter - cloud solution



Ideal for leak detection service providers and for companies/major corporations with multiple locations.

- Each “user” in the leakage search team can be assigned a role (e.g. leakage search, leakage repair, monitoring, checking for success)
- Access rights to individual or all projects can be assigned individually to each user
- The browser-based software ensures a common database in real time and paperless documentation

CS Leak Reporter - PC solution

Creates detailed ISO50001 reports. Provides an illustrated overview of the leaks found and their savings potential. Measures for elimination, including status computers

Leakage Report	Start: 15/04/2019	End: 25/04/2019	Duration: 10 day(s)
Contact details:	Customer:	Auditor:	
Company:	Acme	John Sample	
Address:	--	1 Sample St., 12345 Sampletown	
E-mail:	johnacme@sample.com	j.sample@acme.com	
Phone:	--	+49 1234 567890	
Logo:			
Project master data:		Improvements:	
Import date:		CO ₂ emissions:	0.527 kg/kWh
Cost calculation basis:	Energy costs (70%)	Specific output:	0.12 kWh/m ³
Compressed air costs:	21.8 €/1000 m ³	Electricity price:	0.18 €/kWh
Operating hours per year:	4350 h		
Results:			
Number of leaks:	141	Number remedied:	1
Total leakage amount:	718.126 ltr/min	Leakage amount saved:	3.466 ltr/min
Total costs per year:	4,048.49 €	Costs saved per year:	19.55 €
Total CO ₂ per year:	11.91 tonnes	CO ₂ saved per year:	0.06 tonnes



Leak tag:	1	
Building – location	COMPRESSOR ROOM 1	Repair under pressure possible? - No
Date and time:	15/04/2019 12:06:03	Error: Ball valve defective
Leakage rate:	< 1.395 ltr/min	Spare part: 1/2" ball valve
Costs per year:	< 7.86 €	Action: Replace
Total CO ₂ per year:	0.02 tonnes	Note: -
Priority:	Low	Status: Open
Comment:	Replace ball valve	Remedied on: - Remedied by: -
Leak tag:	2	
Building – location		Repair under pressure possible? - No
Date and time:	15/04/2019 12:08:19	Error: Flange leaking
Leakage rate:	2.519 ltr/min	Spare part: DN 100 flange seal
Costs per year:	14.2 €	Action: Reestablish seal
Total CO ₂ per year:	0.04 tonnes	Note: -
Priority:	High	Status: Done
Comment:	Reestablish flange seal	Remedied on: 16/04/2019 Remedied by: AM



Accessories included in the set:




For ergonomic and safe working with the LeakCam 600



Transport case

LeakCam600 and accessories always safely stowed away



Leak Tags

for marking the leaks on site



18 V 2 Ah
Einhell PowerX-Change
• 400 g / 14.10 oz
• Min 2.5 hr operating time
• LED battery status



18 V 4 Ah Plus
Einhell PowerX-Change
• 595 g / 20.9 oz
• Min 5 hr operating time
• LED battery status



Einhell Power X-Charger 3A

40 min charging time for 2Ah batteries
75 min charging time for 4Ah batteries

Order no.



DESCRIPTION	ORDER NO.
LeakCam 600 set consisting of: LeakCam 600 leak detector, with integrated camera, 64 ultrasonic microphones for visualizing the leak on the screen, incl. 100 Leak Tags and Carrying/neck strap	0601 0305 0560 0305
Rechargeable battery (18 V 2 Ah) Einhell Power X-Change	0691 0130
Rechargeable battery (18 V 4 Ah Plus) Einhell Power X-Change	0691 0131
Battery charger, Einhell X-Charger 3A	0691 0132
Transport case	0554 0206



Accessories



DESCRIPTION

Multi-Direction Ultrasonic tone generator for leak testing. A handy ultrasonic tone generator is available for detecting leaks in systems that are not under pressure. The transmitter is positioned so that the sound can enter the pipe system. The ultrasonic signal penetrates the smallest openings, which can then be detected with the LeakCam 600

ORDER NO.

0554 0203



DESCRIPTION

500 leak tags for marking the leaks on site

ORDER NO.

0530 0107

Software



DESCRIPTION

CS Leak Reporter V2

Creates detailed ISO 50001 reports. Provides an illustrated overview of the leaks found and their savings potential. Measures for elimination, including

ORDER NO.

0554 0205

New functions:

- Simple spare parts management
- Histogram functions for documenting continuous improvement in accordance with ISO 50001 on the company or building level



DESCRIPTION

CS Leak Reporter V2 – additional licence for one computer

ORDER NO.

Z554 0205CS



DESCRIPTION

CS Leak Reporter – cloud solution

Basic package:

Browser-based access to the CS Cloud.

Advantages:

- Common database of all users in real time.
- Cross-location work in a team
- Paperless documentation.
- Unlimited number of guest logins (read-only rights) can be set up. Only available in combination with at least one CS Cloud (0554 0306) user licence.

ORDER NO.

0554 0305



DESCRIPTION

User licence – CS Cloud

1 user / 12 months for CS Leak Reporter Cloud solution use.

- 1 user / 12 months for CS Leak Reporter Cloud solution use.

ORDER NO.

0554 0306

0554 0307

Calibration LeakCam 600



DESCRIPTION

Re-calibration / LeakCam 600

ORDER NO.

0560 3333




Calculation:

Pressure						
	0.5 mm	1.0 mm	1.5 mm	2.0 mm	2.5 mm	3.0 mm
3bar	€ 90	€ 361	€ 812	€ 1,444	€ 2,256	€ 3,248
4bar	€ 113	451	€ 1,015	€ 1,805	€ 2,820	€ 4,061
5bar	€ 135	541	€ 1,218	€ 2,166	€ 3,384	€ 4,873
6bar	€ 158	632	€ 1,421	€ 2,527	€ 3,948	€ 5,685
7bar	€ 180	722	€ 1,624	€ 2,888	€ 4,512	€ 6,497
8bar	€ 203	812	1,827	€ 3,248	€ 5,076	€ 7,309

Table: Leakage costs in one year with 24-hour operation 365 days per year calculated with compressed air costs of 1.9ct/Nm³.

Comfort

With the comfortable neck and carrying strap from Zeiss,
you always have one free hand.

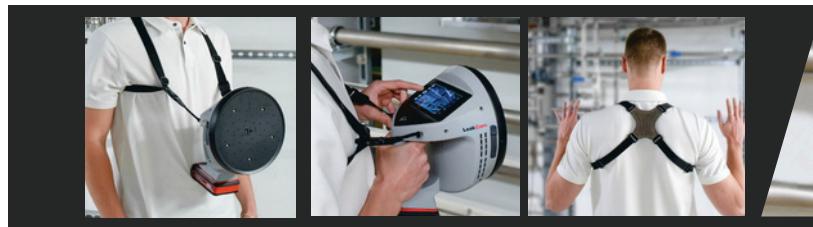

Technical data

TECHNICAL DATA LEAKCAM 600

Microphones:	: 64 MEMS mikrophones (2-80 kHz)
Measuring range:	: > 250 mbar Distance: 0,3...120 m : 2 l/h from 3 m
Camera:	Resolution: 13 MP 8x digital zoom 77.3° diagonal Autofocus High Dynamic Range (HDR) Illumination: 5 LEDs
Laser:	Wave lenght: 630...660 nm Output power: < 1 mW (laser class 2)
Interface:	Size Resolution: 1280 X 720 Pixel Touch screen: capacitive Brightness: adjustable USB interface A+C
Data logger:	128 GB SD memory card (100 million values) Internal rechargeable Li-Ion batteries approx. 2,5 hr. continuous operation (2 Ah) approx. 5 hr. continuous operation (4 Ah)
Operating temperature:	-5...+50 °C
EMC:	DIN EN 61326
Weight:	1130 g / 39.85 oz 400 g / 14.10 oz 595 g / 20.9 oz
Handling:	One-handed or freehand





Trykluftshop ApS - 9200 Aalborg SV - Denmark + 82 10 70 20

www.trykluftshop.dk

