



## VD 500 - Flow sensor for wet compressed air

For measuring immediately downstream of the compressor in moist air up to +180 °C

### FIELD OF APPLICATION:

- Measurement immediately downstream of the compressor
- Measurement at high temperatures



### Benefits at a glance:


- **New:** Unique sensitivity in the lower measuring range: Measures from as little as 2 m/s and thus covers the complete operating range of variable speed drive (VSD) compressors
- Particularly suitable for extremely high flow rates
- Flow, total consumption, temperature and pressure
- Measurement at high temperatures, max. temperature 180 °C
- Can be used in pipes from DN 20 to DN 600
- Installation via 1/2" ball valve under pressure

### Typical applications:

- Measurement of the capacity of compressors
- Compressed air audits
- Efficiency measurement of compressed air systems

### Installation requirements:

- After functioning water separator
- In horizontal lines (recommended) or in risers

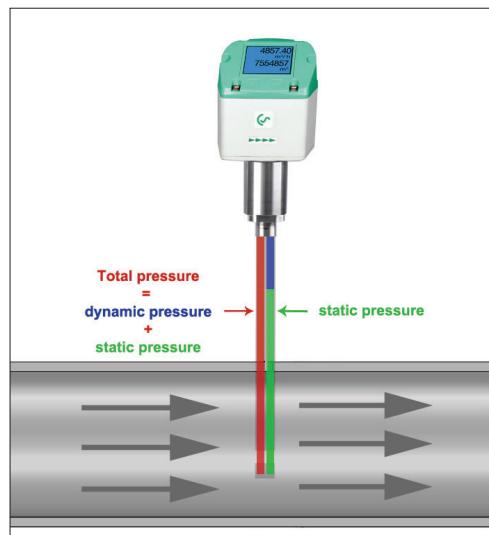

The integrated, precise differential pressure sensor measures the differential pressure/dynamic pressure at the sensor tip. The pressure depends on the respective gas velocity. The flow is therefore easy to determine by means of the pipe diameter.

The additional measurement of temperature and absolute pressure and calculation of the relevant density means that measuring can be carried out for various gases, a wide variety of temperatures and pressures.

### TECHNICAL DATA VD 500

#### Measuring range:

2 up to 224 m/s / 600 m/s (Compressed air)  
0,04 to 500 mbar Differential pressure for gases

#### Measured medium:

Air, non-aggressive gases

#### Accuracy:

± 1.5% of m.v.

#### (m.v.: of meas. value)

Differential pressure

#### Measuring principle:

1:100

#### Measuring span:

t 99: < 1 sec.

#### Response time:

-30 °...+180 °C

#### Temperature of the medium:

-1...+30 bar (g)

#### Operating pressure:

-20 °...+70 °C

#### Ambient temperature:

18...36 VDC, 5 W

#### Power supply:

As standard:

RS 485 (Modbus-RTU), 4...20 mA, pulse

#### Optional:

Ethernet Interface (PoE), M-Bus, IO-Link



Example order code VD 500:

0690 5001\_A1\_B1\_C1\_D1\_E1\_G1\_J1\_K1\_M1

Measuring range	
A1	224 m/s
A2	600 m/s
A3	0,04 - 500 mbar Differential pressure (gases)

Screw-in thread	
B1	G 1/2"
B2	NPT 1/2"
B3	PT 1/2"

Installation length / shaft length	
C1	220 mm
C2	400 mm

Display	
D1	with integrated display

Signal outputs / bus connection option	
E1	2x 4...20 mA analogue output (electrically not isolated), pulse output, RS 485 (Modbus-RTU)
E2	Ethernet interface (Modbus/TCP), 1 x 4...20 mA analogue output (not electrically isolated), RS 485 (Modbus-RTU)
E3	Ethernet interface PoE (Power over Ethernet) (Modbus/TCP), 1 x 4...20 mA analogue output (not electrically isolated), RS 485 (Modbus-RTU)
E4	M-Bus, 1 x 4...20 mA analogue output (not electrically isolated), RS 485 (Modbus-RTU)
E5	IO-Link, 1 x 4...20 mA analog output (not galvanically isolated), RS 485 (Modbus RTU), pulse output not applicable

Reference standard	
G1	20 °C, 1000 mbar
G2	0 °C, 1013.25 mbar
G3	15 °C, 981 mbar
G4	15 °C, 1013.25 mbar


Calibration	
J1	No real gas calibration - Adjustment of gas type via gas constant
J2	Real gas calibration in selected gas type

Gas type	
K1	Compressed air
K2	Nitrogen (N2)
K3	Argon (Ar)
K4	Carbon dioxide (CO2)
K5	Oxygen (O2)
K6	Nitrous oxide (N2O)
K7	Natural gas (NG)
K8	Helium (He)
K9	Propane (C3H8)
K10	Methane (CH4)
K11	Biogas (Methane 50%: CO2 50%)
K12	Hydrogen (H2)
K90	Further gas / please indicate gas type (on request)
K91	Gas mixture / please indicate mixture ratio (on request)

Max. pressure	
M1	30 bar (g)
M3	2 bar (g)
M4	10 bar (g)

DESCRIPTION	ORDER NO.
VD 500 flow sensor for wet compressed air	0690 5001 + Order code A...K...
<b>Accessories:</b>	
ISO calibration certificate	3200 0001
High-pressure protection	0530 2205
Configuration see page 127	

## Simple installation and removal under pressure

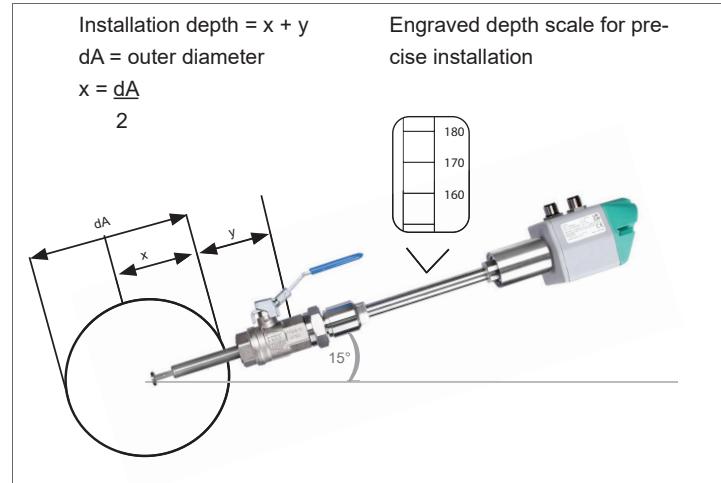

Recommended installation position

Flow measuring ranges VD 500 for compressed air (ISO 1217:1000 mbar, 20 °C)				
Inside diameter of pipe		Measuring range		
Inch	mm	DN	m³/h	cfm
3/4"	21,7	DN 20	2 ... 215	1.2 ... 127
1"	27,3	DN 25	3,2 ... 357	1.9 ... 210
1 1/4"	36,0	DN 32	5,7 ... 644	3.4 ... 379
1 1/2"	41,9	DN 40	8 ... 886	4.7 ... 522
2"	53,1	DN 50	13 ... 1450	8 ... 853
2 1/2"	68,9	DN 65	23 ... 2484	13 ... 1462
3"	80,9	DN 80	31 ... 3440	18 ... 2025
4"	110,0	DN 100	57 ... 6391	34 ... 3762
5"	133,7	DN 125	85 ... 9453	50 ... 5564
6"	159,3	DN 150	120 ... 13436	71 ... 7908
8"	200,0	DN 200	190 ... 21230	112 ... 12495
10"	250,0	DN 250	296 ... 33211	175 ... 19547
12"	300,0	DN 300	428 ... 47881	252 ... 28182



Trykluftshop ApS - 9200 Aalborg SV - Denmark + 82 10 70 20

[www.trykluftshop.dk](http://www.trykluftshop.dk)